


Product Catalogue 2018



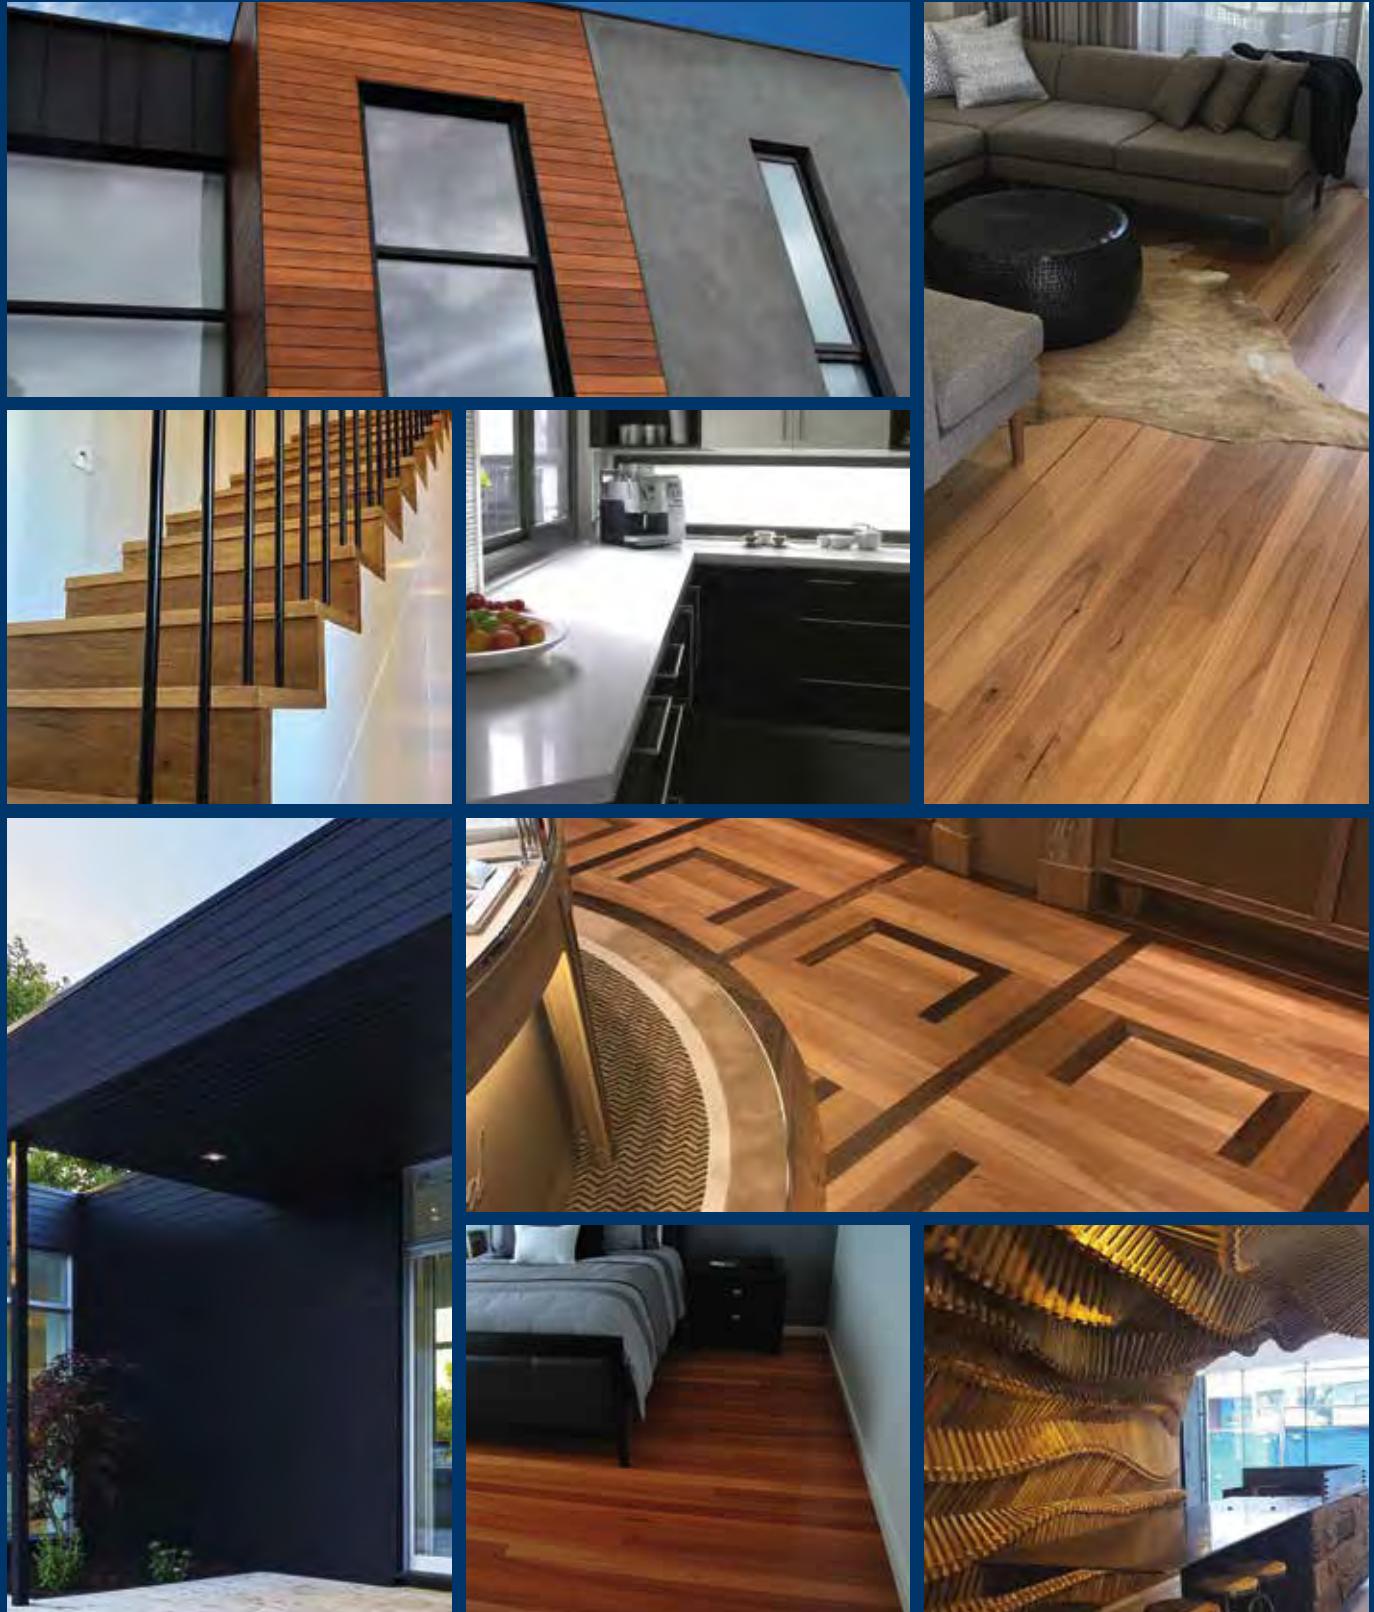

Contents

Fourteen	4
Ultra10	4
Hurford Roasted	5
Hurford Sports Floor	5
Australian Native	6
First Floors	7
HM Walk	8
Elegant Oak & Premiére Oak	9
Clic Oak	10
Naked Oak	11
Hurford Herringbone	12
Natural Impressionist	13
Wood Elements	14
Shou Sugi Ban	16
Hurford Roasted Ash Decking	18
Decking & Screening	19
NaturaStone	20
OneTrim	21
Wall Linings	22
Joinery Timber	23
Panel & Plywood	24
Landscaping & Structural Timber	25
Cypress Products	26
About Hurford Wholesale	27





FOURTEEN

SECRET NAIL WIDE BOARD OVERLAY

"Fourteen" developed for people who love the look of wide hardwood boards but don't want the traditional top-nail appearance in their floor.

Fourteen has been fully designed and tested with the support of the "Australian Timber Flooring Association" for optimal performance as a floor covering. Fourteen's unique attributes have been designed to work in harmony with the fixing methods and the subfloor to ensure a balanced stable floor is achieved.

Specifications

Species:	Blackbutt, Blue Gum, Brushbox, Grey Box, Grey Ironbark, New England Blackbutt, Red Ironbark, Silvertop Stringybark*, Spotted Gum & Tallowwood
Grade:	Select, Prestige, Standard, Rustic & Feature **
Profile:	Tongue & Groove Offset (End Matched)
Size:	130mm x 14mm & 180mm x 14mm
Lengths:	600mm – 4500mm

*130 wide only. **grades will depend on width and species – please check before quoting/ordering.

Ultra10

SOLID HARDWOOD FLOORING

Solid hardwood flooring creates a beautiful living space and it's a environmentally wise choice.

Using state of the art manufacturing techniques, Hurford Hardwood has maximised the use of the resource by producing a 10mm thick board that is incredibly stable and has the same lifespan as much thicker products.

Ultra10 has been designed to be installed over a solid subfloor such as Plywood and Particleboard flooring.

Specifications

Species:	Spotted Gum, Sydney Blue Gum, Flooded Gum, Blackbutt, Brushbox, Grey Ironbark
Grade:	Select, Prestige or Rustic
Profile:	Micro Tongue & Groove (Plain End)
Size:	86mm x 10mm
Wear layer:	5.5mm
Lengths:	400mm – 2700mm
Packaging:	Ultra10 is supplied in small random length bundles, each with around 3m ² .



The Hurford Roasted process metamorphosis the natural colour of hardwood to create a deep rich tone that penetrates through the wood.

Hurford Roasted is a high temperature thermally modified hardwood that uses a custom designed heating program to alter the woods molecular structure. This has many benefits that include locking in the colour, increasing the durability and limiting movement to a fraction of normal kiln dried flooring.

Specifications

Colours:	Peat: a natural dark earth hue. Cayenne: an intimate reddish bronze palette.
Colour penetration:	100% through the board
Grade:	Prestige & Rustic
Profile:	Tongue & Groove Offset (End Matched)
Size:	86 x 10mm, 83 x 14mm, 128 x 14mm & 178 x 14mm
Ware layer:	5.5mm
Lengths:	600mm – 4500mm (128&178mm), 400mm – 2700mm (86&83mm)

HURFORD

SPORTS FLOOR

We understand the importance of performance.

Hurford Wholesale have developed unique product specific drying and processing techniques that assure the quality and stability of all Hurford Sports Flooring.

Our specialty hardwood flooring is ideal for basketball courts, volleyball courts, gymnasiums, handball courts, futsal pitches, aerobics & dance studios and multi-purpose halls.

Specifications

Species:	Blackbutt, Spotted Gum
Profile:	Tongue & Groove Offset (End Matched)
Size:	60mm x 20.5mm
Wear layer:	7.5mm
Lengths:	900mm – 5400mm
Grade:	Standard & Better
Coating:	Unfinished
Milling Standard:	AS2796.1




Emphasising Australia's much loved classic species
Blackbutt, Blue Gum, Brush Box, Ironbark & Spotted Gum.

Australian Native provides that organic, natural, warm feeling. The pre-finished range features a square edge profile and an ultra matt finish, to achieve a floor that's earthy and effortless. Manufactured using a low shrinkage and eco-friendly Hevea as the core material and a tough Australian hardwood lamella for the wear layer, produces a product that's consistent in quality and structural stability.

Australian Natives construction also incorporates a licensed Välinge click system, using a single action installation method, which saves time and ensures you can enjoy your new floor instantly.

Specifications...

Species	Blackbutt, Blue Gum, Brush Box, Ironbark, Spotted Gum & Rustic Blackbutt	Blackbutt & Spotted Gum
Core Material	Hevea	Hevea
Locking System	Välinge 5G Glueless Joining System	Välinge 5G Glueless Joining System
Width	132mm	180mm
Thickness	13.5mm	13.5mm
Wear Layer	4mm	4mm
Length	1,820mm & 2,130mm	1,820mm & 2,130mm
Surface	Smooth Texture	Smooth Texture
Coating	UV cured 6 coat Klumpp system	UV cured 6 coat Klumpp system
Finish	Ultra Matt 10% Gloss	Ultra Matt 10% Gloss
Coverage	1,820mm - 1.922m ² & 2,130mm - 2.249m ²	1,820mm - 1.966m ² & 2,130mm - 2.300m ²
Packaging	8 rows per box, maximum of 2 nested rows	6 rows per box, maximum of 2 nested rows
Matching Accessories	EVERwalk & HUSHwalk Underlays, Trims & Scotia	EVERwalk & HUSHwalk Underlays, Trims & Scotia

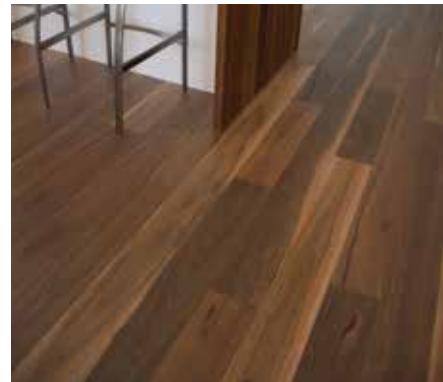



FIRST FLOORS

Premium Australian Engineered Hardwood


LUXURY IN ANY SPACE BRINGS THE
FEELING OF STYLE AND SOPHISTICATION,
AND STARTS FROM THE FLOOR UP.

First Floors is a premium engineered floor, with its slightly textured surface and modern matt oil finish it is the perfect choice for interiors of distinction. With the coastal golden rays of Blackbutt, the attractive wild warmth of Spotted Gum and the deep rich tones of Roasted Peat this boutique collection offers only the finest from our Australian species.

Roasted Peat, is an Australian Hardwood that has been through a thermal modification process that uses no chemicals to permanently alter the structure of the wood fibre. This process greatly increases the stability and density of the hardwood, as well as locking in the gorgeous deep earth to chocolate brown colour tones.

PRODUCT SPECIFICATION

Description	Engineered Hardwood Floor
Species	Roasted Peat: Deep earth to dark chocolate. Blackbutt: Even light honey through to golden nutty browns. Spotted Gum: Light coffee brown to dark chocolate with some reddish tinges.
Wear Layer	4mm
Core Material	Plantation Eucalyptus plywood
Size	180mm wide x 19mm thick - 1.98m ² per box 132mm wide x 15mm thick - 1.742m ² per box
Profile	Tongue and Groove End Matched 0.3mm eased edge
Length	Random 600mm to 2,200mm long
Finish	WOCA Denmark UV cured Oil
Surface	Medium Brush texture
Installation	Glue Down, Floated

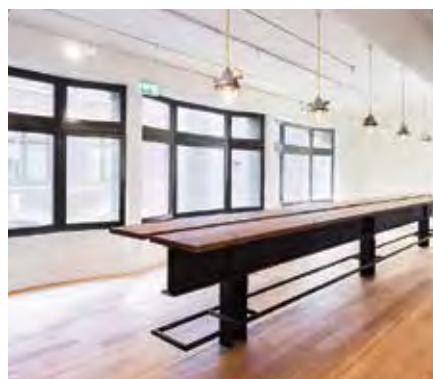



HM WALK

HARDWOOD ENGINEERED FLOORING
BY HURFORD FLOORING

WALK on your very own REAL Hardwood floor today.


In the hectic world we all live in, its nice to be able to take the time and WALK on a beautiful Engineered Hardwood floor. With its unique glueless locking system HM WALK is fast and easy to install in your home.

HM WALK is an engineered hardwood floor, which means that the surface you WALK on and see is made of strong hardwood, while underneath the surface HM WALK uses an extremely stable 9 ply construction made of plantation Eucalypt. This type of construction ensures the maximum use of our precious hardwood, which in turn is better for the environment.

Specifications...

Species	Blackbutt, Spotted Gum, Blue Gum, Brush Box, Ironbark, Jarrah*	American White Oak
Core Material	Plantation Eucalypt	Plantation Eucalypt
Locking System	Välinge 2G glueless joining system	Välinge 2G glueless joining system
Profile	Micro Bevel (ends and sides)	Micro Bevel (ends and sides)
Size	136mm x 13.5mm 186mm x 13.5mm	186mm x 13.5mm
Wear Layer	0.6mm	0.6mm
Length	1,830mm	1,830mm
Surface	Smooth	Smooth
Coating	13 Coats incorporating Aluminium Oxide	13 Coats incorporating Aluminium Oxide
Finish	Satin (35% gloss)	Matt (12% gloss)
Coverage	136mm: 1.793M ² 186mm: 2.042M ²	186mm: 2.042M ²
Packaging	6 rows per carton, with up to 2 nested rows	6 rows per carton, with up to 2 nested rows
Install Suitability	Floating, direct glue	Floating, direct glue
Sub Floor Heating Suitability	Yes	Yes
Install Over	Wood, concrete, plywood & particleboard flooring	Wood, concrete, plywood & particleboard flooring
Colour Match Accessories	Aluminium trims & MDF wrapped scotia	Aluminium trims & MDF wrapped scotia

*Jarrah is only available in the 136mm board width.

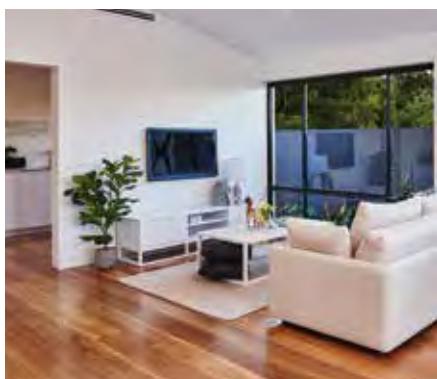



Première Oak BY HURFORD FLOORING

Inspired by the beautiful, old-world features of French décor.

Capturing all the characteristics of France, this luxurious and contemporary French Oak engineered collection by Hurford Flooring, has been carefully chosen to complement any s home, commercial or retail.

The durability, strength and high quality engineered timber floor replicates all the same elements of solid timber flooring. The distinctive knots, grains and texture under foot provides a look and feel that showcases a true appearance. Hurford Flooring uses a resilient 7 coat Treffert UV lacquer system that ensures it is stain, scuff, scratch and slip resistant.

Specifications...

Feature	Première Oak	Elegant Oak
Description	Engineered Flooring	Engineered Flooring
Specie	Genuine French Oak	Genuine French Oak
Colour Tones	Bateau, Burnt Umber, Natural, Slate Grey, Smouldered, Vintage, White Wash	Bateau, Burnt Umber, Natural, Slate Grey, Smouldered, Vintage, White Wash, Raw
Appearance	Rustic	Rustic
Width	190mm	189mm
Thickness	12mm	15mm
Length	Up to 2100mm	Up to 1830mm
Wear Layer	2mm	4mm
Finish	Ultra Matt	Ultra Matt
Surface	Light Brush Texture	Light Brush Texture
Connection	Tongue & Groove	Tongue & Groove





CLIC Oak by Hurford Flooring is stylish, durable and simple to install.

CLIC Oak has been designed to compliment a vast variety of interior styles and decor.

The distinctive knots, grain and texture of CLIC Oaks' surface are combined with quality materials making up the multi-layer construction. These features replicate the same elements of a true solid Oak floor with the added strength and durability that comes with the engineered production.

CLIC Oak incorporates click flooring technology, which is based on a single action method of flooring installation. Easy as one, two, CLIC!



6 coat
impact resistant
german lacquer
system

matching access-
ories

25 year
construction
warranty

5G^c
click

Species: European Oak

Colour Stains: Vintage, Smouldered, Whitewash, Monaco, Slate Grey, Natural

Appearance: Rustic

Core Material: Hevea

Locking System: Valinge 5G Glueless joining system

Profile: Micro bevel 4 sides

Size: 185mm x 13.5mm

Wear Layer: 4mm lamella (nominal)

Length: 1,820mm & 2,130mm

Surface: Medium wire brushed texture

Coating: UV-cured 6 coats of Klumpp Coating

Finish: Matt (10% gloss)

Coverage: 1820mm - 2.020M²/box & 2130mm - 2.364M²/box

Packaging: 6 rows per box, maximum of 2 nested rows

Install Suitability: Floating or direct glued

Install Sub-Floor Heating: Yes

Install Over: Wood, concrete, plywood & plywood over concrete

Colour Match Accessories: Aluminium trims & MDF wrapped scotia



Premium European Oak Engineered Flooring



Be exposed to Naked Oak.

Manufactured in a world class mill, Naked Oak is a masterful combination of genuine European Oak bonded to a strong plantation eucalypt plywood core. The engineered profile features kissed edges on all four borders, to create an overall dimensional look, and a traditional tongue and groove locking system for easy installation. Each lamella has been exclusively sorted and graded, with only the highest quality oak qualifying for production.

Naked Oak is finished using a wire brushing technique, removing the soft grain to create a surface with natural depth and texture. The uninterrupted topographic like grain of the Oak is accentuated with a Natural stain which simultaneously illuminates the distinct almond, blonde tones to the deep champagne hues of the heartwood.

NATURAL:

- Profile: Micro bevel 4 side
- Surface: Medium wire brushed texture
- Coating: UV cured 7 coat Treffert lacquer system
- Finish: Ultra matt 10-15%
- Install Suitability: Floating, direct glued, staples & nailed down

Naked Oak is available in RAW; a finely sanded, square edged, unfinished product. Designed to be stained and finished on-site. RAW is the ideal selection to achieve a custom design vision, with limitless choices of stains and finishes to reflect one's personal taste or style.


RAW:

- Profile: Fine sand, square edge
- Surface: Smooth
- Coating: Uncoated
- Finish: Unfinished
- Install Suitability: Direct glued, staples & nailed down



Specifications:

- Species: Genuine European Oak
- Colour Stains: Natural, RAW (unfinished)
- Appearance: Prime
- Core Material: Plantation Eucalyptus Plywood
- Locking System: Tongue & Groove (ends & sides)
- Size: 190 x 15mm
- Wear layer: 4mm lamella
- Length: 1,900mm
- Coverage: 2.166M²/box
- Packaging: 6 rows per box, maximum of 2 nested rows
- Install Sub-Floor Heating: Yes
- Install Over: Wood, concrete, plywood & plywood over concrete
- Colour Match Accessories: Aluminium trims & MDF wrapped scotia



Hurford Herringbone

hurfordflooring.com.au

CREATE A STRIKING CUSTOM SHOWPIECE FROM THE FLOOR UP USING HURFORD HERRINGBONE ENGINEERED PARQUET FLOORING.

Each block of Hurford Herringbone is carefully constructed using a prime grade Oak lamella for the wear layer, which is bonded to a strong Eucalyptus plywood core and reinforced with a veneer backing. This type of construction ensures product stability and quality assurance.



ADD A CUSTOMISED STAIN & FINISH.

Hurford Herringbone has been produced leaving an unfinished, uncoated RAW surface. RAW is the ideal selection to achieve a custom design vision, with limitless choices of stains and finishes to reflect one's personal taste or style.

Specifications...

Species:	Oak
Colour Stains:	RAW (unfinished)
Appearance:	Prime
Core Material:	Plantation Eucalyptus Plywood
Locking System:	Tongue and Groove (ends and sides)
Profile:	Square edge (ends and sides)
Size:	120mm x 14mm
Wear Layer:	3mm lamella
Length:	600mm
Surface:	Smooth, lightly sanded
Coating:	Uncoated
Finish:	Unfinished
Coverage:	1.728M ² /box
Packaging:	24 pieces per box
Install Suitability:	Direct glued
Install Sub-Floor Heating:	Yes
Install Over:	Wood, concrete, plywood & plywood over concrete
Colour Match Accessories:	N/A





A new age of practicality, performance and aesthetic appeal.

Natural Impressionist is a Replica Timber Plank that utilises the latest technology to produce the stunning visual effect of a beautiful natural hardwood floor.

Natural Impressionist uses photo-realism images to produce a high definition reproduction of classic hardwoods, which is available in 8 modern colour tones.

Natural Impressionist incorporates the Välinge patented licensed click system for a quick and easy glueless installation.


Natural Impressionist Replica Timber Plank can be installed over virtually any flat, dry substrate including in wet areas such as bathrooms and kitchens.

Its natural timber texture not only creates an emotive connection to the floor, but adds a practical non-slip surface that is quiet underfoot.

For a practical, hard wearing & economical flooring solution suitable for most applications, Natural Impressionist Replica Timber Plank is a superb choice.

Specifications...

Description:	Replica Timber Plank
Colour Tones:	Amber, Cinnabar, Desert Rose, Jasper, Jet, Mica, Obeidian, Zircon
Width:	150mm
Thickness:	5.0mm
Length:	1220mm
Wear layer:	0.5mm, suitable for commercial and residential use
Finish:	Matt
Surface:	Natural Timber Texture
Connection:	Välinge patented licensed click system
VOC test:	European category A+, including 0 Formaldehyde emission

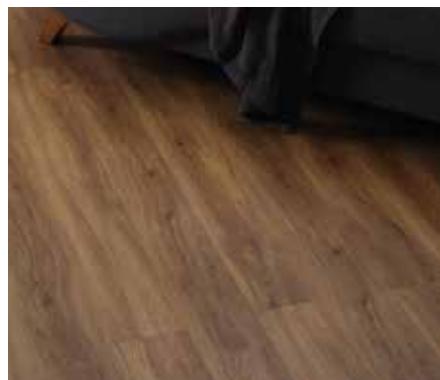



WOOD ELEMENTS brings natural style to any exterior surface, whether as an individual feature or an entire façade.

Only the highest quality and naturally durable species are used in the external range of WOOD ELEMENTS. These included the Australian classics like Spotted Gum, Blackbutt & Ironbark that are sought after around the world for their strength, durability and style.

All the timber species used for the external use are rated Durability Class 1 under Australian Standard AS 5604 -2005, which give these species the highest possible life expectancy ranking – greater than 40 years


Wood ELEMENTS is a complete solution for any wall, offering not just the cladding but all the detailed trims required to finish off the project and ensure a watertight result.

Using our expertise in drying and machining hardwoods and our detailed designs enables us to manufacture not only an incredibly beautiful cladding, but also a precision piece of timber suitable for all the ELEMENTS under the Australian sun.

WOOD ELEMENTS can be used externally utilizing the highly durable Australian species or internally where the addition of American White Oak is also available to give a modern crisp look.




Designer profiles...

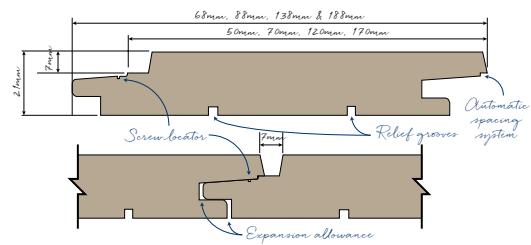


Coulee

Following a traditional shadowline profile, Coulee is about flow. The contemporary shadowline can be installed in either vertically or horizontally. This open profile enables water to drain away, ensuring a barrier to the wall.

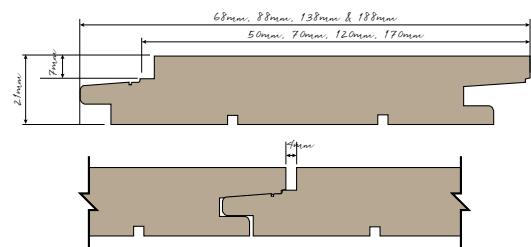

Flume

With its narrow channel, Flume creates a clean square edged pencil shadowline for crisp definition between each board.

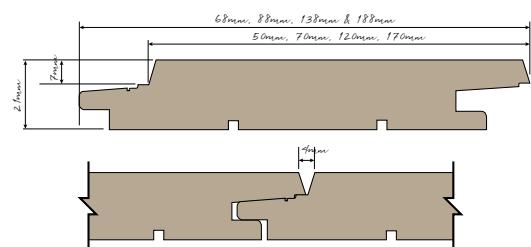

Ravine (internal use)

A profile with a deep escarpment creating a distinctive "V" shaped ravine. The deep "V" shadowline will bring sophisticated clean lines to any interior.

Architecture specifications...

Architectural Specification

PRODUCT NAME	WOOD ELEMENTS CLADDING
Profile Name:	Coulee, Flume & Ravine
Cover Size:	50mm, 70mm, 120mm or 170mm X 21mm
Timber:	Blackbutt, Spotted Gum, Ironbark & American White Oak (internal use only)
Grade:	Prestige
Fixing:	Concealed stainless steel 8g 50mm AW drive screw
Joining:	End Matched with fitted moisture proof gasket
Trim – External Corner:	1. Aluminium with fitted moisture proof gasket. 2. Wood with moisture proof gasket.
Trim – Internal Corner:	1. Aluminium with fitted moisture proof gasket. 2. Wood with moisture proof gasket.
Trim – End Stop:	1. Aluminium with fitted moisture proof gasket. 2. Wood with fitted moisture proof gasket.
Pre Oiling:	Feast Watson Traditional Timber Oil (optional factory finish)
Finish:	2-3 coats of Feast Watson Traditional Timber Oil following installation
Product Sampling:	200mm long profile/species samples available.



A complete system.

Hurford's Shou Sugi Ban Refined Architectural Cladding combines the ancient Japanese craft of fire treatment with a precision milled, architectonic cladding profile. It is a complete solution for any exterior wall, offering not just the cladding but a selection of customised trims to ensure a streamline execution and watertight result.

The timber species selected to manufacture Hurford's Shou Sugi Ban is ethically sourced and processed by Hurford's locally owned and operated facility in Queensland, Australia. Favourably sort after for its natural qualities and unique appearance, Callitris glaucophylla is highly durable and a naturally termite resistant species. Applying the fire treatment forces an additional barrier of protection against insect attack and decay, furthermore increasing the species overall durability.

Hurford's uses a modernised Shou Sugi Ban technique, the process evenly chars the face of the board before it is cooled and finished to Hurford's 'Straight Charred' effect.

Hurford's Shou Sugi Ban Refined Architectural Cladding, is an aesthetically pleasing yet durable façade option.

Achieve great design without great effort by integrating our charred timber cladding into your next designs façade.

Why choose Hurford's Shou Sugi Ban Refined Architectural Cladding?


Hurford's are one of the oldest companies in the Australian timber manufacturing business. Our love and expertise for drying and manufacturing timber products along with our heed for innovation in our industry subsequently fuels our drive to produce quality timber products, and in this case, a quality timber system.

Hurford's Shou Sugi Ban Refined Architectural Cladding is a complete solution for any wall, offering not just a precision milled piece of charred timber cladding but also the detailed trims to ensure a streamline finish and watertight result.

Profile Design Coulee




Collective features include:

- Relief grooves which are designed to take the stress out of the cladding, reducing the effect of warping and cupping.
- A specially designed 'ridge locator' connects with the overlap line providing an effortless straight-line finish, simultaneously controlling the expansion allowance for any timber movement.
- Screw location line indicates exactly where to fix the cladding board, allowing the next row to slide over the existing board and create a secret fix finish.

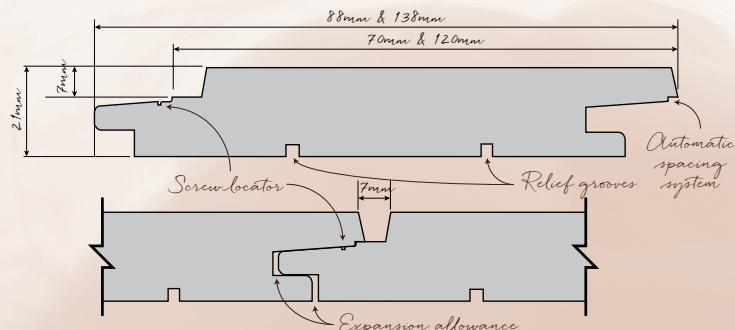

Trim designs external corner, internal corner, end stop

Hurford's Shou Sugi Ban trims provide a streamline finish and play an integral part in ensuring a water tight finish. All aluminium trims are factory fitted with waterproof gaskets* designed to decrease the on-site sealing process, and reduced the delivery of loose materials.

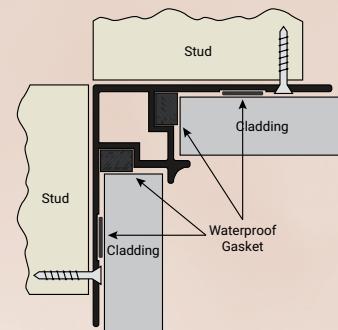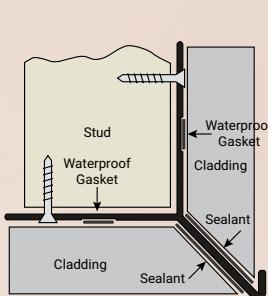


* 9mm x 1.6mm gaskets are factory fitted. Additional foam gaskets, to form second moisture barrier, are available in rolls for on-site installation, or alternative sealant method can be implemented.

Features end matched, moisture barrier system, automatic spacing system.

End Matching


Utilising a specially developed end match system for external use, Hurford's Shou Sugi Ban endmatch profile has a micro bevel edge designed to encourage water to drain away from the join. Applying a bead of sealant to the join at installation stage eliminates moisture transfer and ensures a watertight connection.

End matching the product means the boards can be fixed mid stud, eliminating the need to dock and create volumes of waste, saving up to 10% of the product that previously would have been thrown away. Not only does this save costs, it's a better for our environment with less resource being used.

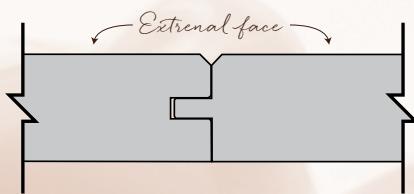

Moisture Barrier System

All trims in the Hurford's Shou Sugi Ban Cladding range feature a factory fitted seal, the foam gaskets compress and expand with timber movement, an extra safeguard against the Australian storm season. Factory fitted gaskets eliminate the on-site sealing process, reducing labour costs. The Moisture Barrier System does not eliminate the need for good building practice and meeting the Building Code of Australia.

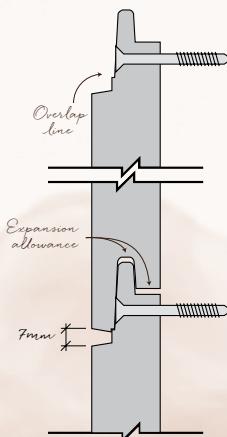

Automatic Spacing System

The Automatic Spacing System allows expansion to be placed between the boards, which is automatic and doesn't require any special tools or spacers to get right. The specially designed ridge locator controls the expansion allowance and in addition helps with concealing the cladding screw if the boards were to lose moisture. The expansion is designed to take out any stress caused if the boards absorb or lose moisture.



Specifications

CLADDING

Profile: Coulee

Width: 88mm (70mm cover)
& 138mm (120mm cover)

Thickness: 21mm

Length: Random

Moisture Content: AS1080.1

Fixing: Concealed fixing

Species: Callitris

Joining: End-matched, micro bevel

Finish: Straight Charred

BAL: Standard Production BAL-LOW

*Australian Hardwoods with BAL-29 rating available upon request.

TRIMS

External Corner: Powdercoated Aluminium

Internal Corner: Powdercoated Aluminium

End Stop: Powdercoated Aluminium

Straight Charred Finish

Hurford's 'Straight Charred' process removes the heavily charred top layer to reveal a subtle textured surface that accentuates the blackened grain and features of the timber.

HURFORD ROASTED ASH DECKING



Stability Plus

Hurford Roasted Ash Decking is extremely stable with around half the movement of other kiln-dried timber decking products. Making this decking unlikely to warp, check, bow, cup or twist, expand or contract.

Chemical Free Treatment

Roasted Ash uses a thermal high temperature treatment that changes cell structure to reduce woods absorbency. This significantly improves and protect the product resistance from mould and rot without the use of any chemicals.

End Matched Decking

Using a specially designed end matched profile created for external use, means the decking can be joined anywhere, rather than having to dock material (creating waste) and joining on top of a joist - this translates to a saving of precious resource as well as money.

Traditional or Secret Fixing

Hurford Roasted Ash Decking can be fixed using the traditional method through its face or using the unique invisible fixation system. The decking clips provide a gap for optimal ventilation between the decking boards and substructure the enhances drying and prevents waterlogging.

Keep your deck looking good

All timbers age and change colour when used outside. To help protect against this, coating your deck with a suitable external decking finish is advisable. This will assist in maintaining and protecting your deck into the future*


*Always follow the manufacturers instructions when applying decking finishes – particularly around the number of coats required and the frequency of recoating to maintain the best possible finish.

Technical information...


Species	North American White Ash
Grade	Select
Treatment	All Natural, Chemical FREE, Thermally Modified
Colour	Dark Chocolate Brown Tones with Defining Grains
Width	132mm
Thickness	20mm
Length	Random 1000mm to 4200mm long
Profile	3mm Pencil Round on Side
End Locking	V-Joint End Matched JEM™
Joist Spacing	450mm
Fixing	Unique Invisible Fixation System or Traditional
Install Aid	Specially Designed T-Bar Clamp




Profiled for secret fixing

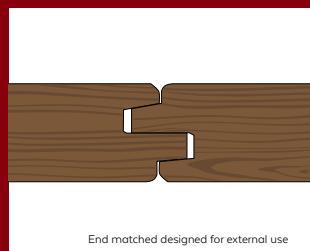

End matched designed for external use

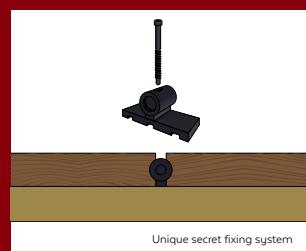

Unique secret fixing system

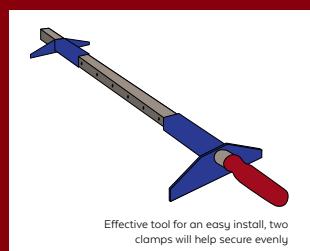

Effective tool for an easy install, two clamps will help secure evenly



Decking

Decking is a great feature to add to your home. With this valuable addition your living and entertaining space is extended for you to enjoy outdoor living for years ahead.

Hurford have kiln dried decking timber available in both Australian and Imported hardwoods in a wide range of species, sizes and grades.



Screening

Timber screening is a cost effective, durable and decorative way to provide more privacy, hide areas from view, protect from the elements or provide security.

Hurford have kiln dried screening timber available in both Australian and Imported hardwoods in a wide range of species, sizes and grades.



The Most Advanced Quartz Surface



NaturaStone is a 6mm thick Australian Made Quartz Surfacing material combining beauty with ease of handling and exceptional durability.

NaturaStone can be readily applied to an infinite variety of residential and commercial projects.

NaturaStone can be installed as a complete new counter top or surface, or applied on site, easily resurfacing existing counter tops and surfaces.

NaturaStone applications include:

- | | |
|--------------------------|-------------------------|
| » Kitchen counter tops | » Food service counters |
| » Splashbacks | » Commercial counters |
| » Bar tops | » Fascia panels |
| » Bathroom vanity tops | » Lift car panels |
| » Shower and bath panels | » Dining tables |
| » Shower bases | » Coffee tables |

See website for full colour range.





OneTrim is a collection of radiata pine, white pre-primed, kiln dried, finger jointed mouldings. We offer an extensive selection from contemporary to traditional profiles that add distinctive features, dimension, texture and architectural interests to your home, retail or commercial interior.

OneTrim mouldings are manufactured from sustainable plantation grown Radiata Pine. A timber species that is lightweight yet strong and durable, making OneTrim very easy to work with. Any natural knotty character or imperfections are removed and then a finger jointed process is implemented. OneTrim mouldings are given a surface sand to smooth out finger jointed joins or raised gains, then two coats of white primer is applied producing a quality finish.

Fixing Installation Guide

Storage	Prior to installation, store OneTrim mouldings inside the room you intend to install, so they can acclimatise to the environment. Keep DRY and off the ground as mouldings may take in moisture over time. Keep mouldings stacked flat to avoid bending.
Health & Safety	When handling moulding make sure, you wear the appropriate personal protective equipment (PPE); gloves, safety glasses, respiratory protection equipment and your workspace is well ventilated. For more in depth information please view OneTrims Material Safety Data Sheet (MSDS) on our website.
Cutting & Chiselling	When cutting mouldings to length with a power or hand held saw, use sharp saw blades to prevent jagged edges. If required to use a chisel ensure that the tool is sharp and well maintained. Recommend you prime and seal saw cuts to stop moisture intake.
Nailing	To make certain that the installation of mouldings is secure, it is strongly recommended you nail and use construction adhesive glue. If using a nail gun you want the nail to be slightly below the moulding surface. To avoid the nail shooting too deep, you will need to make adjustments to suit moulding thickness. Fill nail holes with a quality wood filler.
Sanding & Painting	To prep mouldings before painting, give them a slight sand for an even coat and wipe over to remove any dust or residue. Then you are ready to paint on your top coat, one or two coats may be required.
Disposal	Dispose of OneTrim mouldings, at a permitted landfill facility in accordance with local, state and federal regulations. It is a good idea to keep some unused offcuts for any unforeseen repairs.



Primed & Ready for
your choice of Topcoat



Internal
Installation Only



Time Saving on
Preparation Time



Strong
& Durable



Warranty on
Structural Integrity

To view the full collection of OneTrims moulding profiles and size options, please visit www.onetrim.com.au.

Wall Linings



HURFORD RECYCLED TIMBER

TURNING THE PAST INTO THE FUTURE

Hurford Recycled Timber is made from timber that is destined to be scrapped such as old railway sleepers. They are carefully machined to produce a high quality wall lining and flooring product.



Le Mur Tonnellerie

Le Mur Tonnellerie is the preservation and transformation of century old French Oak wine barrels into beautiful unique engineered Wall Lining and Flooring.



hardWALL
INDUSTRIAL HARDWOOD LINING

hardWALL is a natural timber wall lining that offers a very unique industrial look that will transform the identity of a space, creating a raw modern atmosphere.



Hurford's Engineered Flooring range and Solid Hardwood Flooring can all be used as a feature wall/s or ceiling lining product. Creating a look that are both stylish and dramatic.

For more information on these products please visit our website www.hurfordwholesale.com.au or call your Hurford Wholesale state office.

Joinery Timber

Wood is an attractive construction material from stunning furniture pieces through to spectacular staircases and door joinery as well a striking feature structures. It offers a superior performance with design options only limited to your imagination.

Hurford's specialise in producing and supplying an extensive range of joinery timbers to the requirements of timber merchants, joiners and manufacturers all over Australia.

Our diverse range of Australian and Imported species enhance the appearance selection for colour tones and grains for all design opportunity.

By having quality control over processes, we make certain the timber supplied at the beginning is to a high standard to reflect through to the end internal or external application.

- Australian and Imported Joinery Timber Species in array of grades, sizes and random length packs available.



Panel & Plywood



Structural Plywood (CD)

Structural plywood is an engineered wood panel designed to be a high-strength sheet for use in general structural building and construction, subject to an application's load bearing requirements.



Feature Ply (AC, BB, BC)

Commonly finished in a clear to highlight the face, Feature Ply is ideal for use in broad range of structural and non-structural applications including decorative ceiling and wall linings, whether left solid, slotted or perforated with small holes.



Marine Ply

Manufactured using high quality plantation hoop pine veneers and a type A Phenolic bond, hoop pine plywood is well suited to marine applications based on its density, bending strength, impact resistance and surface finishing characteristics.



Hardform Formply

Durable and reusable, Hardform is made from cross-banded veneers and high quality phenolic surfaces to provides users with the convenience of both bi-directional strength (F14 or F17) and dimensional stability.

Other Panel and Plywood products we can supply:

- » Structural Plywood (CD)
- » Non-Structural Plywood (CD)
- » Bracing Plywood
- » Feature Plywood (AC, BB, BC)
- » Bendy Ply
- » Lauan Ply
- » Lightweight Falcata
- » BB/CC Plywood
- » Plywood Cladding
- » Marine Ply (BS1088)
- » Marine Ply (AS/NZS 2272-2006)
- » Particleboard Flooring Ply
- » T & G Hardwood Flooring Ply
- » T & G Softwood Flooring Ply
- » Hardform Formply
- » Formply (Softwood)
- » Particleboard Raw
- » White Melamine Particleboard
- » Particleboard Flooring
- » MDF Raw
- » While Melamine MDF

Landscaping & Structural Timber



Hurford Wholesale's stock consists of quality fencing and landscaping timbers and a range of structural F graded timbers ideal for high strength applications. We have treated stock available for above and in ground protection against fungal decay, borers and termites.

Landscaping products:

- Hardwood Palings Tan E H3
- Hardwood Rails Tan E H3
- Hardwood Posts Tan E H4
- Hardwood Sleepers Tan E H4

Palings, rails and posts also available in treated pine.



Structural products:

- Green Hardwood F14 Untreated
- Green Hardwood F17 Untreated
- Green Hardwood F22 Untreated
- Green Hardwood F14 Treated
- Green Hardwood F17 Treated
- Green Hardwood F22 Treated
- Cypress Sawn Unseasoned F7
- KD Hardwood F27 Non Durable (interior only)
- KD Hardwood F27 Dura 1 (exterior use)



Cypress Products



Cypress is an economical and sustainable softwood timber, plentiful in NSW and QLD. The highly durable species is naturally termite resistant making it ideal for building and construction applications such as cladding, fencing and landscaping, while the features of Cypress timber creates an appealing and unmistakable flooring product.

Hurford's extensive range of Cypress products include:

- Screening & Decking
- Solid select grade flooring
- Pre-finished solid flooring
- Solid flooring with reverse VJ profile
- Chamfer & Shiplap
- Sawn Unseasoned F7
- Sawn Unseasoned Posts

Our Cypress harvested from the Barakula State Forest in Western Queensland is otherwise known as "Barakula Gold", due to the superior quality of the raw material. Hurford's Cypress Mill in Chinchilla is the only licensee in the Barakula State Forest, and as such Hurford is the sole supplier of the Barakula Gold range of Cypress.



About Hurford Wholesale



The Hurford Group.

Covers the entire supply chain from the management and harvesting of forest resources, processing, manufacturing, sales and distribution of wood products in Australia and around the world.



50 + Timber Species.

Strong relationships forged over the decades with producers both domestically and internationally allow Hurfords to source an impressive variety of native and exotic specialty timbers.



An Australian Business.

Founded in 1932 Hurfords is an Australian third generation family business, strongly dedicated to the native hardwood timber industry, celebrating over 85 years of trade.



International Export.

We offer local Hardwoods, Cypress and Hurford Flooring lines for shipping to all major international markets. Hurfords international based branches: New Zealand, North America and France.



Nationwide Distribution.

With distribution warehouses located in Queensland, New South Wales, Victoria, South Australia and Western Australia Hurfords are able to efficiently service the Australian market.



Environmental Awareness.

Hurfords have purchased over 5000 hectares of land and have commenced a planting program that will see more than 25000 new plantation eucalypt saplings established each year.



Queensland

400 Stapylton-Jacobs Well Road,
Stapylton QLD 4207
(07) 3442 6300
salesqld@hurfordwholesale.com.au

New South Wales & Australian Capital Territory

Unit 6, 34-38 Anzac Avenue,
Smeaton Grange NSW 2567
(02) 4646 1406
salesnsw@hurfordwholesale.com.au

Victoria & Tasmania

47-57 Wedgewood Road,
Hallam VIC 3803
(03) 8794 3300
salesvic@hurfordwholesale.com.au

South Australia & Northern Territory

7-9 Acorn Road,
Camden Park SA 5038
(08) 8376 6694
salessa@hurfordwholesale.com.au

Western Australia

0448 132 955
saleswa@hurfordwholesale.com.au

