


PRODUCT INFORMATION & INSTALLATION GUIDE

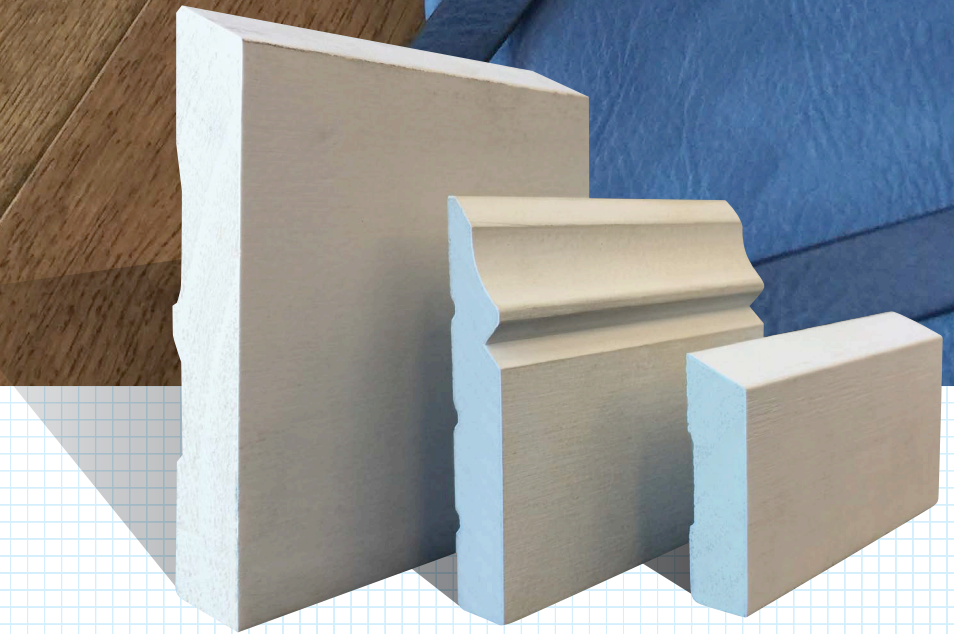

ONETRIM
HURFORD WHOLESALE

**RADIATA PRE-PRIMED WHITE
FINGER JOINTED MOULDINGS**

www.onetrim.com.au



OneTrim is a collection of radiata pine, white pre-primed, kiln dried, finger jointed mouldings. We offer an extensive selection from contemporary to traditional profiles that add distinctive features, dimension, texture and architectural interests to your home, retail or commercial interior.

OneTrim mouldings are manufactured from sustainable plantation grown Radiata Pine. A timber species that is lightweight yet strong and durable, making OneTrim very easy to work with. Any natural knotty character or imperfections are removed and then a finger jointed process is implemented. OneTrim mouldings are given a surface sand to smooth out finger jointed joints or raised gains, then two coats of white primer is applied producing a quality finish.



Primed & Ready for your choice of Topcoat



Internal Installation Only



Time Saving on Preparation Time



Strong & Durable



Warranty on Structural Integrity

Fixing Installation Guide

Storage	Prior to installation, store OneTrim mouldings inside the room you intend to install, so they can acclimatise to the environment. Keep DRY and off the ground as mouldings may take in moisture over time. Keep mouldings stacked flat to avoid bending.
Health & Safety	When handling moulding make sure, you wear the appropriate personal protective equipment (PPE); gloves, safety glasses, respiratory protection equipment and your workspace is well ventilated. For more in depth information please view OneTrims Material Safety Data Sheet (MSDS) on our website.
Cutting & Chiselling	When cutting mouldings to length with a power or hand held saw, use sharp saw blades to prevent jagged edges. If required to use a chisel ensure that the tool is sharp and well maintained. Recommend you prime and seal saw cuts to stop moisture intake.
Nailing	To make certain that the installation of mouldings is secure, it is strongly recommended you nail and use construction adhesive glue. If using a nail gun you want the nail to be slightly below the moulding surface. To avoid the nail shooting too deep, you will need to make adjustments to suit moulding thickness. Fill nail holes with a quality wood filler.
Sanding & Painting	To prep mouldings before painting, give them a slight sand for an even coat and wipe over to remove any dust or residue. Then you are ready to paint on your top coat, one or two coats may be required.
Disposal	Dispose of OneTrim mouldings, at a permitted landfill facility in accordance with local, state and federal regulations. It is a good idea to keep some unused offcuts for any unforeseen repairs.

To view the full collection of OneTrims moulding profiles and size options, please visit www.onetrim.com.au.

Distributed By Hurford Wholesale

QLD (07) 3442 6300 | VIC & TAS (03) 8794 3300
 NSW & ACT (02) 4646 1406 | SA & NT (08) 8376 6694
 Email: info@hurfordwholesale.com.au
 Web: www.hurfordwholesale.com.au

Available from: