
# HURFORD'S

# **Product Catalogue**



# Contents

Environment Focus	3
Wood Elements	4
Shou Sugi Ban	6
Joinery Timber	8
Fourteen+	9
The Woodlands Collection	10
XL Parquetry	15
American Oak	16
French Oak	16
Solid Oak Block Parquetry	16
Hurford Sports Floor	17
The Importance In Selecting The Right Finish For Your Floor	17
Australian Native	18
Australian Native Herringbone	18
HM Walk	19
First Floors	19
Hurford Herringbone	20
Naked Oak	20
Genuine Oak	21
Hurford's Parquetry	21
OneTrim	22
EchoPanel	23
Organic Decking, Decking, Screening & Shiplap	24
Wall Linings	25
Landscaping & Structural Timber	26
Cypress Products	27
Panel & Plywood	28
STRUCTApanel H2	29
NaturaStone	30
About Hurford's	31

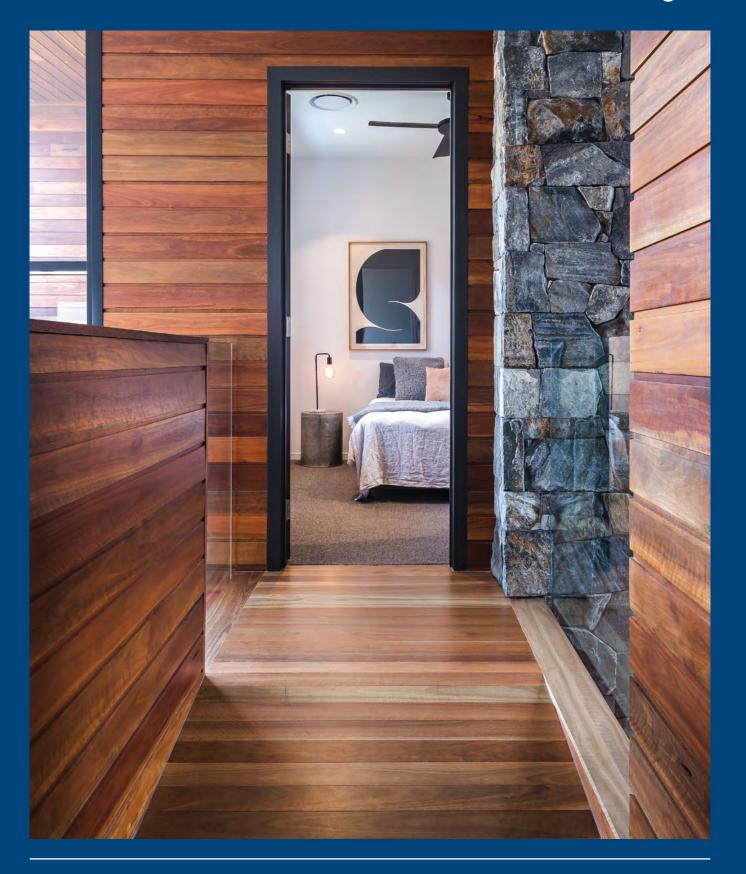







# **Environment Focus**

"Responsibly sourced wood is the only renewable building material available; it is naturally grown and removes CO2 from the atmosphere. Wood products then store the carbon that the growing trees have removed from the air (about 50% of the dry weight of wood is carbon).

The production and processing of wood uses much less energy – called embodied energy – than most other building materials, giving wood products a significantly lower carbon footprint. Wood can be used to substitute for materials that require larger amounts of fossil fuels to be produced."

Quote from Make It Wood, organised by Planet Ark.



Sustainability and longevity of the timber industry is always on the agenda for the Hurford family. With over 90 years of trade and a vision to invest for the future, Hurford's is dedicated to doing there bit to help the environment. By investing in land to establish their own plantations they aim to commence ongoing sustainable harvesting and management of these plantations in years to come.

Hurford's is an accredited company, obtained by a third party assessment body to provide the confidence that Hurford's is compliant and upholds environmental standards and requirements of specific Australian codes of practice.

Hurford's are committed to our forest, our environment and our future.









# WOOD ELEMENTS brings natural style to any exterior surface, whether as an individual feature or an entire façade.


Only the highest quality and naturally durable species are used in the external range of WOOD ELEMENTS. These include the Australian classics Blackbutt, Ironbark, Spotted Gum, Tallowwood & Turpentine. Sought after around the world for their strength, durability and style.

# **Architectural Specification**

PRODUCT NAME	WOOD ELEMENTS CLADDING
Profile Name:	Coulee, Flume & Ravine
Species:	Blackbutt, Ironbark, Spotted Gum, Tallowwood & Turpentine.
Appearance:	Dressed Face or Sawn Brushed Face
Size:	68mm, 88mm or 138mm x 21mm
Length:	Random
Grade:	Standard & Better
Moisture Content:	Per AS2796.1
Fixing:	WURTH ASSY®PLUS A2 DECKING CONSTRUCTION SCREW 0166115550 Available to purchase from Hurford's.
Joining:	End Matched, Micro Bevel
Trim - External Corner:	Aluminium with fitted moisture proof gasket.     Wood with moisture proof gasket.
Trim - Internal Corner:	Aluminium with fitted moisture proof gasket.     Wood with moisture proof gasket.
Trim - End Stop:	Aluminium with fitted moisture proof gasket.     Wood with moisture proof gasket.
Pre-Oil Option:	Intergrain® Industrial Universal Timber Oil.







Ravine







# 

BY HURFORD'S

# A complete system.

Hurford's Shou Sugi Ban Refined Architectural Cladding combines the ancient Japanese craft of fire treatment with a precision milled, architectonic cladding profile. It is a complete solution for any exterior wall, offering not just the cladding but a selection of customised trims to ensure a streamline execution and watertight result.

The timber species selected to manufacture Hurford's Shou Sugi Ban is ethically sourced and processed by Hurford's locally owned and operated facility in Queensland, Australia. Favourably sort after for its natural qualities and unique appearance, Cypress is highly durable and a naturally termite resistant species. Applying the fire treatment forces an additional barrier of protection against insect attack and decay, furthermore increasing the species overall durability.

Periodic maintenance, including reapplying a fresh coat of Feast Watson Timber and Deck Stain, Black Japan or Intergrain Industrial Solid Timber Stain Charred Black is required to maintain the dark burnt texture of the product. Leaving the product unmaintained or uncoated will lead to the dark Shou Sugi Ban to naturally patina and age, changing its appearance. This change in appearance will not affect the performance of the product.

# **Specifications**

### **CLADDING**

Profile: Coulee

Width: 88mm (70mm cover), 138mm (120mm cover). Cypress is also available in 118mm (100mm cover).

Thickness: 21mm

Length: Random

Moisture Content: AS1080.1

Fixing: Stainless Steel 304 Black Zinc Coated Screw 5.5 x 50mm. Available to purchase from Hurford's

Species: Cypress, Durable Australian Hardwoods,

BAL-29 Australian Hardwoods

Joining: End-matched, micro bevel

Finish: Charred and Pre Oiled Feast Watson Timber and Deck Stain, Black Japan

### **TRIMS**

External Corner: Powdercoated Aluminium

Internal Corner: Powdercoated Aluminium

End Stop: Powdercoated Aluminium













# **Profile Design Coulee**

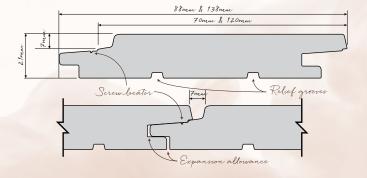

# Trim designs external corner, internal corner, end stop

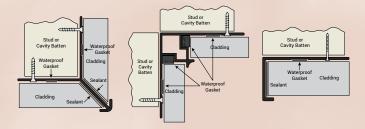

# Joinery Timber

Wood is an attractive construction material from stunning furniture pieces through to spectacular staircases and door joinery as well a striking feature structures. It offers a superior performance with design options only limited to your imagination.

Hurford's specialise in producing and supplying an extensive range of joinery timbers to the requirements of timber merchants, joiners and manufactures all over Australia.

Our diverse range of Australian and Imported species enhance the appearance selection for colour tones and grains for all design opportunity.

By having quality control over processes, we make certain the timber supplied at the beginning is to a high standard to reflect through to the end internal or external application.

- · Australian and Imported Joinery Timber Species in array of grades, sizes and random length packs available.
- · Blackbutt
- · Walnut
- · Blue Gum · Brush Box
- · Spotted Gum
- · Durian
- · Melunak · Rosewood
- · Jelutong
- · Kwila
- · Surian

- · NZ Pine
- · Amoora
- · Cherry
- · Meranti
- Euro Beech
- · American Oak
- · French Oak
- · American Ash
- · Rock Maple

- · QLD Maple
  - Tallowwood
  - · Victorian Ash
  - · Jarrah
  - · Ironbark











# **FOURTEEN** +

SOLID HARDWOOD TIMBER FLOORING | BY HURFORD'S

Creating beautiful timeless hardwood floors has never been easier or more affordable than with FOURTEEN + from Hurford's. Using the highest quality Australian Hardwood, Hurford's have created a superior hardwood floor, designed to better utilise our precious resource and provide an improved long term performance.

## **Better by Design**

With a 7.5mm top shoulder, **FOURTEEN +** increases the number of times the product can be sanded and re-sanded, increasing the longevity of the flooring. **FOURTEEN +** exceeds the wear layer of traditional flooring by 25%.

### Long Lengths


With a length range of 500mm to 4.5m, **FOURTEEN +** has a spread of lengths comparable to a traditional floor, giving the floor a more natural strip flooring appearance.

## **Superior Drying**

Hurford's attention to detail when it comes to drying is unsurpassed and is the foundation of a successful hardwood floor. Superior drying, using exacting kiln schedules, ensure a more stable flooring.


### **Easy Installation**

**FOURTEEN +** can be installed using the same installation method employed with traditional 19mm floors over structural subfloors – using the secret nail and bead gluing system.

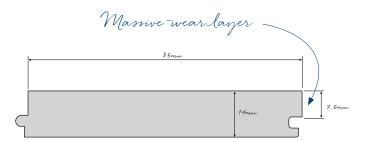

**FOURTEEN +** is a hardwood flooring product designed to be installed on any suitable subfloor, such as plywood, particleboard flooring, or old floorboards.

FOURTEEN + cannot be laid directly to floor joists or battens and is a non-structural product.

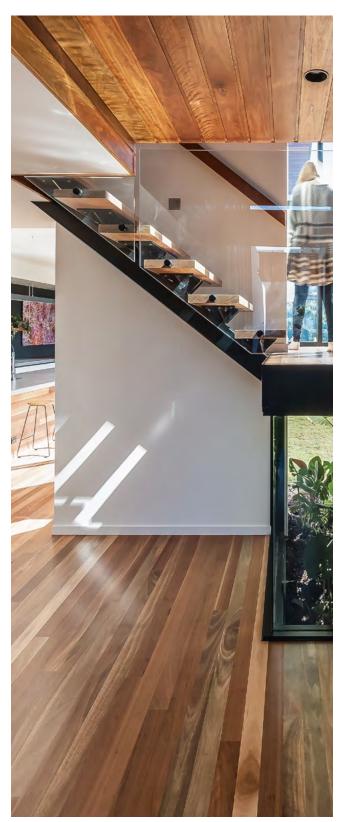

# **FOURTEEN + Specification**

Size 85mm x 14mm

Profile Tongue & Groove, End Matched

Wear Layer 7.5mm

Length 500mm to 4500mm

Grade Select, Standard & Feature

Aust Standard Manufactured to AS 2796.1




Brought together to share the diversity of Australian hardwood species, in one of Hurford's most loved flooring collections.

A Solid Hardwood Floor is an investment for a lifetime. It not only adds value to your home but makes a high-end style statement all on its own.






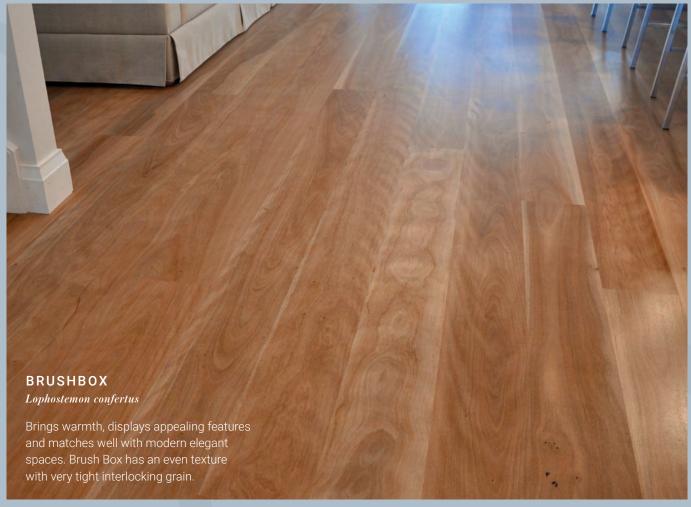








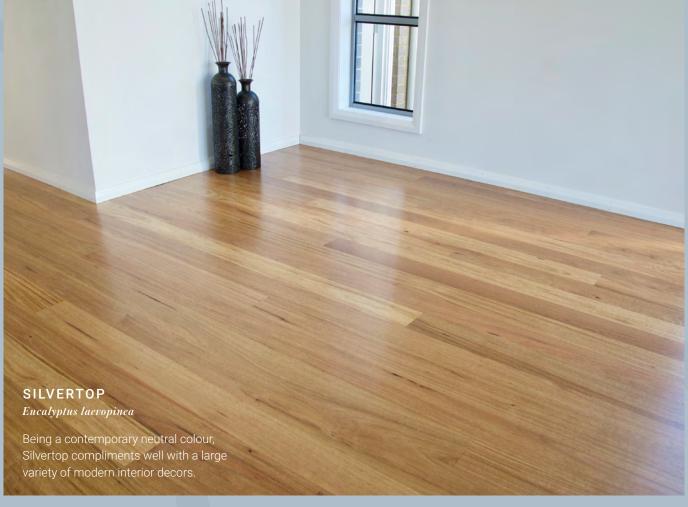

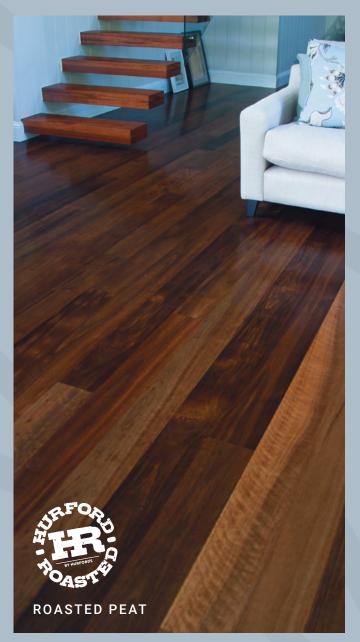



### SPECIFICATIONS


	Ultra10		Overlay		Four	rteen	Tradi	tional	Wide	Board
Species Product Matrix	86 x 10mm	83 x 12mm	86 x 12mm	83 x 14mm	130 x 14mm	180 x 14mm	60 x 19mm	80 x 19mm	130 x 19mm	180 x 21mm
Sydney Blue Gum	0	0	0	0	0	0	0	0	0	0
Brush Box	0	0	0	0	0	0	0	0	0	0
Turpentine	0	0	0	0	0	0		0	0	0
Grey Ironbark	0	0	0	0	0	0	0	0	0	0
New England Blackbutt	0	0	0	0	0	0		0	0	0
Silvertop	0	0	0	0	0	0		0	0	0
Roasted Peat	0			0	128 x 14mm	178 x 14mm				
Roasted Cayenne	0			0	128 x 14mm	178 x 14mm				
Thermally Enhanced Grey Ironbark	0	0	0	0	0	0	0	0	0	0
Thermally Enhanced Red Ironbark	0	0	0	0	0	0	0	0	0	0
Thermally Enhanced Spotted Gum	0	0	0	0	0	0	0	0	0	0
Thermally Enhanced Sydney Blue Gum	0	0	0	0	0	0	0	0	0	0




# A contemporary take on a historic style...

For a standout and visually appealing designed floor, Hurford's XL Parquetry will give your home or commercial space a unique feature with the charm of historic style.

Single blocks are manufactured so they can be installed into endless parquetry patterns, popular patterns suggested are Herringbone, Brick Pattern and Square on Square. A selection of Australian native species are available for you to choose.







## **XL Parquetry Specifications**

AL I diquetily op	Comcations
Species:	Blackbutt, Brush Box, Grey Ironbark, New England Blackbutt, Red Ironbark, Silvertop, Spotted Gum – NSW, Spotted Gum – QLD, Sydney Blue Gum, Thermally Enhanced Sydney Blue Gum, *Roasted Peat & Roasted Cayenne (Other species available on request)
Grade:	Prestige
Profile:	Secret Nail, Tongue & Groove, End Matched
Coating:	Uncoated (Sand and coat once installed)
Size:	130mm x 14mm *Roasted Peat & Roasted Cayenne 128 x 14mm (Different widths available on request)
Length:	650mm *Roasted Peat & Roasted Cayenne 640mm (Different lengths available on request)
Coverage:	1.014M²/box *Roasted Peat & Roasted Cayenne 0.983 M²/box
Packaging:	12 pieces per box – Left and Right Box
Install Over:	Wood, particle board, plywood & plywood over concrete



# **American Oak**

American Oak is a popular species for flooring due to its interesting and pronounced grain pattern. American Oak is also a species that takes stain extremely well, meaning that a multitude of colours can be achieved with little fuss. Hurford's import raw American Oak feed stock, and the timber is re-dried, treated, machined and graded.

American Oak is grown predominantly on the East Coast of the United States. All the White Oak raw material that Hurford's source is from reputable sawmills that practice sustainable forestry.

Species	American Oak
Grade	Prestige or Rustic
Profile	Top Nail, Tongue & Groove (End Matched)
Size	130x19mm, 155x19mm, 180x21mm, 205x21mm & 220x21mm
Lengths	600mm – 4500mm
Colours	Golden honey browns, some boards can have hints of soft pink tones.



# Nothing quite captures the romance of a beautiful hardwood floor, like genuine French Oak.

From the base in Vermelles, France, our own staff source sawn French Oak boards from boutique French Sawmills, through a strict forestry scheme. The sawn French Oak boards are then dried to the rigorous Hurford's standard before the final production and quality assurance phase. Hurford's genuine French Oak Solid Hardwood Flooring is graded to capture all the character and charm of this extraordinary resource.

Species	French Oak
Grade	Provincial, Rustic
Profile	Top Nail Tongue & Groove (End Matched)
Size	83mm x 12mm, 130mm x 12mm, 180mm x 21mm, 195mm x 21mm, 205mm x 21mm,
Lengths	600mm - 2500mm






# Solid Oak Block Parquetry Herringbone and Chevron

Parquetry is a unique floor system with its decorative patterns, adds quality and value to new and renovated spaces.


Species	European Oak
Grade	Prestige
Profile	Square Edge
Size	123mm x 18mm
Lengths	700mm
Coating	RAW (Sand and coat once installed)
Pieces Per Box	12 Pieces
Coverage Per Box	1.033m²



Herringbone Pattern



Chevron Pattern

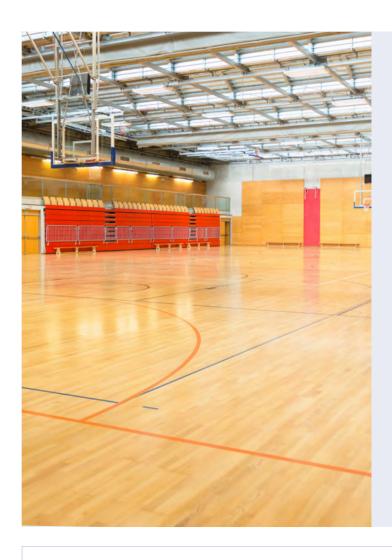

# WE UNDERSTAND THE IMPORTANCE OF PERFORMANCE.

Hurford's have developed unique product specific drying and processing techniques that assure the quality and stability of all Hurford Sports Flooring.

Our specialty hardwood flooring is ideal for basketball courts, volleyball courts, gymnasiums, handball courts, futsal pitches, aerobics, dance studios and multi-purpose halls.

# HURFORD SPORTS FLOOR BY HURFORD'S

# THE IMPORTANCE IN SELECTING THE RIGHT FINISH FOR YOUR FLOOR.

Choosing Hurford's high quality solid hardwood flooring is an important step to having a beautiful floor installed in your home, but choosing what finish is applied on top of it can make all the difference to the look and feel. Finish choices are developing at a rapid pace and products that give a more natural deep earthly tone are becoming popular.





The above example shows 2 panels of Sydney Blue Gum Flooring with alternate finishes applied. A water based finish gives a lighter appearance whereas an oiled finish brings out a darker tone. These examples are only indicative however they show that a deeper red colour can be achieved depending upon the finish that is applied.

It is recommended to test different finishes on offcut flooring pieces to finalise your finish choice.





Emphasising Australia's much loved classic species Blackbutt, Blue Gum, Brush Box, Ironbark & Spotted Gum.

Speciesw	Blackbutt, Blue Gum, Brush Box, Ironbark, Rustic Blackbutt, Silvertop, Spotted Gum & Tallowwood	Blackbutt, Spotted Gum & Rustic Blackbutt
Core Material	Hevea	Hevea
Locking System	Välinge 5G Glueless Joining System	Välinge 5G Glueless Joining System
Width	132mm	180mm
Thickness	13.5mm	13.5mm
Wear Layer	4mm	4mm
Length	1,820mm & 2,130mm	1,820mm & 2,130mm
Surface	Smooth Texture	Smooth Texture
Coating	UV cured 6 coat Klumpp system	UV cured 6 coat Klumpp system
Finish	Ultra Matt 10% Gloss	Ultra Matt 10% Gloss
Coverage	1,820mm - 1.922m <sup>2</sup> & 2,130mm - 2.249m <sup>2</sup>	1,820mm -1.966m <sup>2</sup> & 2,130mm - 2.300m <sup>2</sup>
Packaging	8 rows per box, maximum of 2 nested rows	6 rows per box, maximum of 2 nested rows
Matching Accessories	EVERwalk & HUSHwalk Underlays, Trims & Scotia	EVERwalk & HUSHwalk Underlays, Trims & Scotia













Australian Native Herringbone provides that organic, natural, warm feeling, pre-finished in two iconic species Blackbutt and Spotted Gum.

Species	Blackbutt & Spotted Gum
Core Material	Hevea
Locking System	Tongue & Groove (ends and sides)
Side Profile	Tongue & Groove
End Profile	End Matched
Edge Profile	Micro Bevel
Size	120mm x 13.5mm
Wear Layer	4mm
Length	600mm
Surface	Smooth Texture
Coating	UV Cured 6 Coat Klumpp System
Coverage	0.576 m²/box
Packaging	8 pieces per box - Set A (left) & Set B (right)
Colour Match Accessories	Aluminium trims & MDF wrapped scotia



# WALK on your very own REAL Hardwood floor today.

	HM WALK SATIN	HM WALK OAK	HM WALK MATTE
Species	Blackbutt, Spotted Gum, Blue Gum, Brush Box, Ironbark, Jarrah*	American White Oak	Blackbutt, Blue Gum, Brush Box, Ironbark, Silvertop, Spotted Gum & Tallowwood
Size	136mm x 13.5mm, 186mm x 13.5mm	186mm x 13.5mm	136mm x 12.5mm
Locking System	Välinge 2G glueless joining system	Välinge 2G glueless joining system	Välinge 5G glueless joining system
Finish	Satin	Matte	Matte
Core Material	Plantation Eucalypt	Plantation Eucalypt	Plantation Eucalypt
Profile	Micro Bevel (ends and sides)	Micro Bevel (ends and sides)	Micro Bevel (ends and sides)
Wear Layer	0.6mm	0.6mm	0.6mm
Length	1,830mm	1,830mm	1,830mm
Surface	Smooth	Smooth	Smooth
Coating	13 Coats incorporating Aluminium Oxide	13 Coats incorporating Aluminium Oxide	13 Coats incorporating Aluminium Oxide
Coverage	136mm: 1.493M² 186mm: 2.042M²	186mm: 2.042M²	136mm: 1.493M²
Packaging	6 rows per carton, with up to 2 nested rows	6 rows per carton, with up to 2 nested rows	6 rows per carton, with up to 2 nested rows
Install Suitability	Floating, direct glue	Floating, direct glue	Floating, direct glue
Sub Floor Heating Suitability	Yes	Yes	Yes
Install Over	Wood, concrete, plywood & particleboard flooring	Wood, concrete, plywood & particleboard flooring	Wood, concrete, plywood & particleboard flooring
Colour Match Accessories	Aluminium trims & MDF wrapped scotia	Aluminium trims & MDF wrapped scotia	Aluminium trims & MDF wrapped scotia















# LUXURY IN ANY SPACE BRINGS THE FEELING OF STYLE AND SOPHISTICATION, AND STARTS FROM THE FLOOR UP.



Blackbutt	Spotted Gum	Blackbutt, Spotted Gum	Roasted Peat
Invisible UV Lacquer	UV Lacquer	UV Hardwax Oil	UV Hardwax Oil
Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Light Brushed	Light Brushed	Light Brushed	Non-Brushed
Matte	Matte	Matte	Matte
Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)
132mm x 13.5mm -	132mm x 13.5mm -	132mm x 13.5mm, 180mm x 13.5mm	- 180mm x 13.5mm
4mm Lamella	4mm Lamella	4mm Lamella	4mm Lamella
1,820mm & 2,130mm	1,820mm & 2,130mm	1,820mm & 2,130mm	1,820mm & 2,130mm
8 rows per box, max of 3 nested rows	8 rows per box, max of 3 nested rows	8 rows per box, max of 3 nested rows	-
-	-	6 rows per box, max of 2 nested rows	6 rows per box, max of 2 nested rows
	Invisible UV Lacquer Micro Bevel Light Brushed Matte Tongue & Groove (ends and sides) 132mm x 13.5mm - 4mm Lamella 1,820mm & 2,130mm 8 rows per box, max	Invisible UV Lacquer  Micro Bevel  Light Brushed  Matte  Tongue & Groove (ends and sides)  132mm x 13.5mm  -  4mm Lamella  1,820mm & 2,130mm  8 rows per box, max of 3 nested rows  UV Lacquer  Micro Bevel  Light Brushed  Matte  Tongue & Groove (ends and sides)  132mm x 13.5mm  -  4mm Lamella  1,820mm & 2,130mm  8 rows per box, max of 3 nested rows	Invisible UV Lacquer UV Lacquer UV Hardwax Oil  Micro Bevel Micro Bevel Micro Bevel Light Brushed Light Brushed Light Brushed  Matte Matte Matte  Tongue & Groove (ends and sides) (ends and sides) (ends and sides)  132mm x 13.5mm 132mm x 13.5mm 132mm x 13.5mm, - 180mm x 13.5mm 4mm Lamella 4mm Lamella 4mm Lamella  1,820mm & 2,130mm 1,820mm & 2,130mm  8 rows per box, max of 3 nested rows of 3 nested rows - 6 rows per box, max

 $*Blackbutt \& Spotted Gum 132mm \times 13.5mm only is available in a RAW uncoated, pre-sanded, square edge option. To be stained and finished on-site$ 



# CREATE A STRIKING CUSTOM SHOWPIECE FROM THE FLOOR UP USING HURFORD HERRINGBONE ENGINEERED PARQUET FLOORING.

## Specifications...

Species:	Oak
Colour Stains:	RAW (uncoated)
Appearance:	Prime
Core Material:	Plantation Eucalyptus Plywood
Locking System:	Tongue and Groove
	(ends and sides)
Profile:	Square edge (ends and sides)
Size:	120mm x 14mm
Wear Layer:	3mm lamella
Length:	600mm
Surface:	Smooth, lightly sanded
Coating:	Uncoated
Finish:	Unfinished
Coverage:	1.728M²/box
Packaging:	24 pieces per box
Install Suitability:	Direct glued
Install Sub-Floor Heating:	Yes
Install Over:	Wood, concrete, plywood &
	plywood over concrete



# Be exposed to Naked Oak.

Manufactured in a world class mill, Naked Oak is a masterful combination of Oak bonded to a strong plantation eucalypt plywood core. The engineered profile features kissed edges on all four borders, to create an overall dimensional look, and a traditional tongue and groove locking system for easy installation. Each lamella has been exclusively sorted and graded, with only the highest quality oak qualifying for production.

Naked Oak is finished using a wire brushing technique, removing the soft grain to create a surface with natural depth and texture. The uninterrupted topographic like grain of the Oak is accentuated with a Natural stain which simultaneously illuminates the distinct almond, blonde tones to the deep champagne hues of the heartwood.

	NATURAL:	RAW:
Species	Oak	Oak
Profile:	Micro bevel 4 side	Fine sand, square edge
Surface	Light brushed texture	Smooth lightly sanded
Appearance	Prime	Prime
Finish	Ultra Matte	RAW (uncoated)
Locking System	Tongue & Groove (ends & sides)	Tongue & Groove (ends & sides)
Size	192mm x 15mm	192mm x 15mm
Length	1,820mm x 2,150mm	1,820mm & 2,150mm
Packaging	6 rows per box, maximum of 2 nested rows	6 rows per box, maximum of 2 nested rows




Genuine Oak Specifications	260/20	240/15	190/15	190/14
Stain Colour	Snowfall, Hamptons, White Wash, Natural Clear, Western, Barrel, Slate Grey and RAW (Uncoated)	Whitehaven, Snowfall, Hamptons, White Wash, Natural Clear, Western, Distress, Smouldered, Urban, Barrel, Vintage, Ash, Sterling, Smokey, Nuage, Chocolate, Slate Grey, Contrast, Tuxedo and RAW (Uncoated)	Whitehaven, Snowfall, Hamptons, White Wash, Natural Clear, Western, Distress, Smouldered, Urban, Barrel, Vintage, Ash, Sterling, Smokey, Nuage, Chocolate, Slate Grey, Contrast, Tuxedo and RAW (Uncoated)	Whitehaven, Snowfall, Hamptons, White Wash, Natural Clear, Western, Distress, Smouldered, Urban, Barrel, Vintage, Ash, Sterling, Smokey, Nuage, Chocolate, Slate Grey, Contrast and Tuxedo
Species	Oak	Oak	Oak	Oak
Coating	UV cured 5 coat Ciranova lacquer system	UV cured 7 coat Treffert lacquer system	UV cured 7 coat Treffert lacquer system	UV cured 7 coat Treffert lacquer system
Edge Profile	Micro Bevel	Micro Bevel	Micro Bevel	Micro Bevel
Surface	Subtle Brush Texture	Subtle Brush Texture	Subtle Brush Texture	Subtle Brush Texture
Appearance	Character	Prime	Character	Character
Finish	Ultra Matte	Ultra Matte	Ultra Matte	Ultra Matte
Locking System	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)
Width	260mm	240mm	190mm	190mm
Thickness (Overall)	20mm	15mm	15mm	14mm
Wear Layer	6mm Lamella	4mm Lamella	4mm Lamella	3mm Lamella
Length	2200mm	2200mm	1900mm	1900mm
Packaging	4 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	5 rows per box, 1 nested row multiple boards up to 3, minimum 600mm	6 rows per box, maximum of 2 nested rows	6 rows per box, maximum of 2 nested rows









Chevron Pattern

Hurford's Parquetry Specifications	PRE-FINISH COLOUR	RAW
Stain Colour	Blonde, Hazel, Mink, Western and Natural Clear	-
Species	Oak	Oak
Pattern	Herringbone or Chevron	Herringbone or Chevron
Coating	UV Cured 6 Coat Klumpp System	RAW (uncoated)
Edge Profile	Micro Bevel (ends and sides)	Fine Sand, Square Edge (ends and sides)
Surface	Light Brushed Texture	Smooth Lightly Sanded
Appearance	Prime	Prime
Finish	Ultra Matte	RAW (uncoated)
Locking System	Tongue & Groove (ends and sides)	Tongue & Groove (ends and sides)
Size	150mm x 14mm	150mm x 14mm
Wear Layer	3mm Lamella	3mm Lamella
Length	750mm	750mm
Packaging	20 pieces per box	20 pieces per box



OneTrim is a collection of radiata pine, white pre-primed, kiln dried, finger jointed mouldings. We offer an extensive selection from contemporary to traditional profiles that add distinctive features, dimension, texture and architectural interests to your home, retail or commercial interior.

OneTrim mouldings are manufactured from sustainable plantation grown Radiata Pine. A timber species that is lightweight yet strong and durable, making OneTrim very easy to work with. Any natural knotty character or imperfections are removed and then a finger jointed process is implemented. OneTrim mouldings are given a surface sand to smooth out finger jointed joins or raised gains, then two coats of white primer is applied producing a quality finish.



Primed & Ready for your choice of Topcoat

# **Fixing Installation Guide**

Storage	Prior to installation, store OneTrim mouldings inside the room you intend to install, so
	they can acclimatise to the environment. Keep DRY and off the ground as mouldings
	may take in moisture over time. Keep mouldings stacked flat to avoid bending.
Health & Safety	When handling moulding make sure, you wear the appropriate personal
	protective equipment (PPE); gloves, safety glasses, respiratory protection
	equipment and your workspace is well ventilated. For more in depth information
	please view OneTrims Material Safety Data Sheet (MSDS) on our website.
Cutting &	When cutting mouldings to length with a power or hand held saw, use sharp saw blades
Chiselling	to prevent jagged edges. If required to use a chisel ensure that the tool is sharp and
	well maintained. Recommend you prime and seal saw cuts to stop moisture intake.
Nailing	To make certain that the installation of mouldings is secure, it is strongly recommended
	you nail and use construction adhesive glue. If using a nail gun you want the nail to be
	slightly below the moulding surface. To avoid the nail shooting too deep, you will need
	to make adjustments to suit moulding thickness. Fill nail holes with a quality wood filler
Sanding & Painting	To prep mouldings before painting, give them a slight sand for an even
	coat and wipe over to remove any dust or residue. Then you are ready
	to paint on your top coat, one or two coats may be required.
Disposal	Dispose of OneTrim mouldings, at a permitted landfill facility in
	accordance with local, state and federal regulations. It is a good idea
	to keep some unused offcuts for any unforeseen repairs.









To view the full collection of OneTrims moulding profiles and size options, please visit www.onetrim.com.au.









# EchoPanel® is the original decorative interior panelling solution, with acoustic qualities and eco-innovation at its core.

EchoPanel® reduces and controls reverberated noise in shared environments, making it ideal for use in a variety of commercial interior spaces including workplace, education and hospitality environments. It is a streamlined product with a fabric-like finish, designed with dematerialisation in mind. Once it's been installed, there is no need to upholster, paint or protect it. Pioneering the war against single-use plastic, EchoPanels® production uses post-consumer recycled PET bottles to create a superior upcycled product with a vast array of interior applications.

View Hurford's website for more colours and patterns.

### **SPECIFICATIONS**

PRODUCT	ECHOPANEL® 7mm	ECHOPANEL® 12mm	ECHOPANEL® 24mm
ORIGIN	Made In Australia	Made In Australia	Made In Australia
COMPOSITION	100% PET (60% Recycled)	100% PET (60% Recycled)	100% PET (60% Recycled)
WEIGHT	1400g/m <sup>2</sup> (+/- 10%)	2400g/m² (+/- 10%)	3000g/m2 (+/- 10%)
THICKNESS	7mm (+/- 7%)	12mm (+/- 7%)	24mm (+/- 7%)
PANEL DIMENSIONS	2800mm (+/-10mm) x 1200mm (+/-5mm)	2800mm (+/-10mm) x 1200mm (+/-5mm)	2400mm (+/-5mm) x 1820mm (+/-10mm)



- ✓ ZERO chemicals used
- ✓ Highest natural durability rating
- ✓ Environmentally friendly option
- ✓ Healthier and non-toxic
- ✓ Better looking deck
- ✓ Sapwood Free
- ✓ Off-cut disposal simple and safe

Hurford's Organic Decking range is free of sapwood, eliminating the application of chemical treatment, providing a safe, healthy and non-toxic decking option. The timber species selected for Hurford's Organic Decking range all have the highest Natural Durability rating of Class 1 above ground Ironbark, Spotted gum (QLD) and Spotted Gum (NSW).



# Decking

Decking is a great feature to add to your home. With this valuable addition your living and entertaining space is extended for you to enjoy outdoor living for years ahead.

Hurford's have kiln dried decking timber available in both Australian and Imported hardwoods in a wide range of species, sizes and grades.

# Screening

Timber screening is a cost effective, durable and decorative way to provide more privacy, hide areas from view, protect from the elements or provide security.


Hurford's have kiln dried screening timber available in both Australian and Imported hardwoods in a wide range of species, sizes and grades.





# Shiplap


Hurford's Shiplap Cladding provides a modern, fresh, stunning clean and straight line option to finish off the exterior of a residential or commercial building. Available in three cover sizes 50mm, 72mm and 122mm x 19mm thick. Available in Australian species Cypress, Blackbutt, Spotted Gum, Tallowwood, Turpentine & Ironbark.

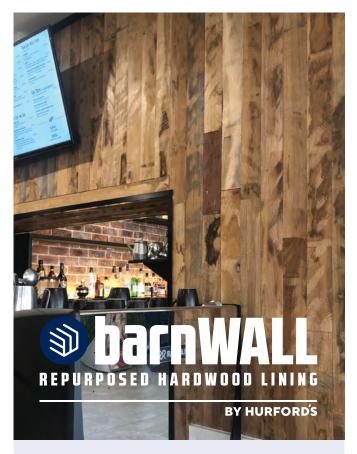

**barnWALL** is a natural timber wall lining that has been repurposed from ageing, disused hardwood, that was once destined to be forgotten.



**hardWALL** is a natural timber wall lining that offers a very unique industrial look that will transform the identity of a space, creating a raw modern atmosphere.

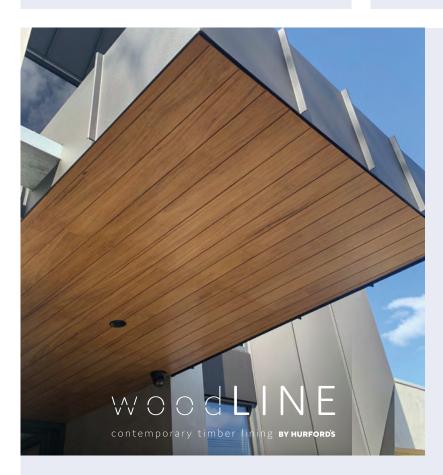


**woodLINE** can be installed as a undercover lining, internal feature wall and ceiling lining. Brings a sense of warmth and elegance to an interior or patio area.

# PROFILE OPTIONS


Two Strip

# There Over Will. There Over Will. There over Will. There over the state of the s


### Shadow Line



### Open VJ



# Landscaping & Structural Timber

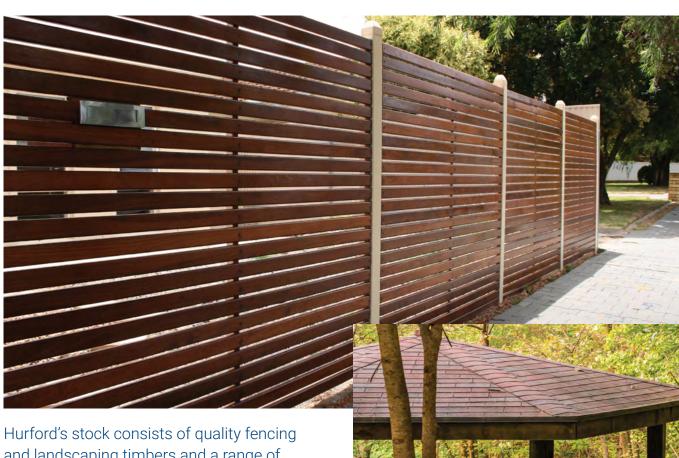

Hurford's stock consists of quality fencing and landscaping timbers and a range of structural F graded timbers ideal for high strength applications. We have treated stock available for above and in ground protection against fungal decay, borers and termites.


## Landscaping products:

- · Hardwood Palings Tan E H3
- · Hardwood Rails Tan E H3
- · Hardwood Posts Tan E H4
- · Hardwood Sleepers Tan E H4


Palings, rails and posts also available in treated pine.

### Structural products:

- · Green Hardwood F14 Untreated
- · Green Hardwood F17 Untreated
- · Green Hardwood F22 Untreated
- · Green Hardwood F14 Treated
- · Green Hardwood F17 Treated
- · Green Hardwood F22 Treated
- · Cypress Sawn Unseasoned F7
- · KD Hardwood F27 Non Durable (interior only)
- · KD Hardwood F27 Dura 1 (exterior use)

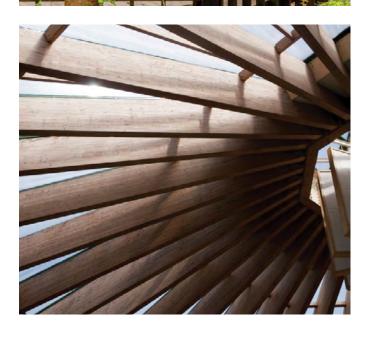

# Cypress Products

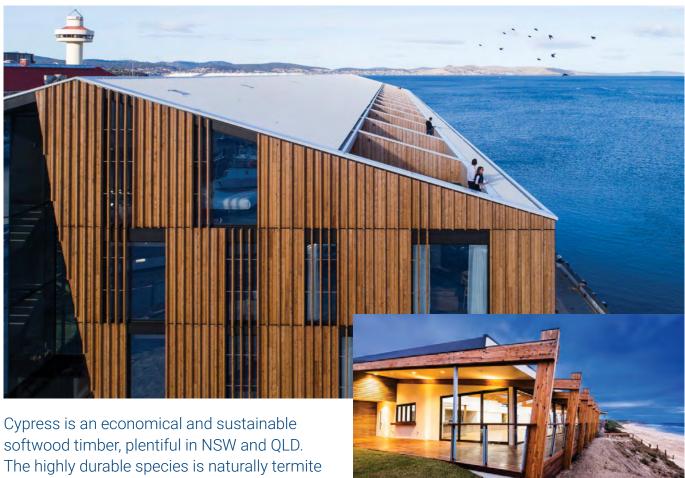

Cypress is an economical and sustainable softwood timber, plentiful in NSW and QLD. The highly durable species is naturally termite resistant making it ideal for building and construction applications such as cladding, fencing and landscaping, while the features of Cypress timber creates an appealing and unmistakable flooring product.

Hurford's extensive range of Cypress products include:

- · Screening & Decking
- · Solid select grade flooring
- · Pre-finished solid flooring
- · Solid flooring with reverse VJ profile
- · Chamfer & Shiplap
- · Sawn Unseasoned F7
- · Sawn Unseasoned Posts

Our Cypress harvested from the Barakula State Forest in Western Queensland is otherwise known as "Barakula Gold", due to the superior quality of the raw material. Hurford's Cypress Mill in Chinchilla is the only licensee in the Barakula State Forest, and as such Hurford's is the sole supplier of the Barakula Gold range of Cypress.





# Panel & Plywood



## Structural Plywood (CD)

Structural plywood is an engineered wood panel designed to be a high-strength sheet for use in general structural building and construction, subject to an application's load bearing requirements.



### Feature Ply (AC, BB, BC)

Commonly finished in a clear to highlight the face, Feature Ply is ideal for use in broad range of structural and non-structural applications including decorative ceiling and wall linings, whether left solid, slotted or perforated with small holes.



### Marine Plv

Manufactured using high quality plantation hoop pine veneers and a type A Phenolic bond, hoop pine plywood is well suited to marine applications based on its density, bending strength, impact resistance and surface finishing characteristics.



# **Hardform Formply**

Durable and reusable, Hardform is made from crossbanded veneers and high quality phenolic surfaces to provides users with the convenience of both bi-directional strength (F14 or F17) and dimensional stability.

# Other Panel and Plywood products we can supply:

- · Structural Plywood (CD)
- · Non-Structural Plywood (CD)
- · Bracing Plywood
- · Feature Plywood (AC, BB, BC)
- · Bendy Ply
- · Lauan Ply
- · BB/CC Plywood

- · Marine Ply (BS1088)
- · Marine Ply (AS/NZS 2272-2006)
- · T & G Hardwood Flooring Ply
- · T & G Softwood Flooring Ply
- · Hardform Formply
- · Particleboard Raw
- · White Melamine Particleboard

- · Particleboard Flooring
- · MDF Raw

# **RUCTApanel H2**<a href="#">12mm Timber Flooring Underlay</a>



Introducing a brand new panel concept to the market - STRUCTApanel H2mm Timber Flooring Underlay. Made with durable materials and 5.5mm High Performance Hardboard Underlay. STRUCTApanel H2 12mm is a 12mm thick high performance panel primarily designed for flooring underlay where it provides a high performance, consistent, flat and durable alternative to other products in the market, with superior nail and staple holding capability.

## **FEATURES & BENEFITS**

- Australian made from sustainable certified plantation forestry
- Highly durable with resin/wax enriched surfaces
- High fixing capacity
- H2 Treated for termite resistance
- Double-sided
- Consistently flat with no internal delamination
- Easy to cut leaving smooth, clean edges
- Excellent adhesion to the sanded surface

### **APPLICATIONS**

Used as an underlay for timber strip flooring on top of the concrete

### **SHEET SIZES**

Sold as 2400x1200mm (actual size approx. 2420x1215mm)

## **TECHNICAL DATA**

- Typical minimum results when measured by a nata accredited third party testing facility
- Exceeds AS1859.1 High performance particleboard requirement
- Formaldehyde Emission E1

## **PERFORMANCE CRITERIA**


	STRUCTApanel	Plywood
Criteria	H2 12mm	12mm
Density - kg/m3	707	458.73
Thickness Swell - %	3.04	4.25
MOR - MPa	25.56	24.44
MOE - MPa	3342	1556
Surface water absorption - g/m2	26.2	534.46
Nail Holding - N	560	502
Surface Hardness – N	4550	3665

Distributed by:







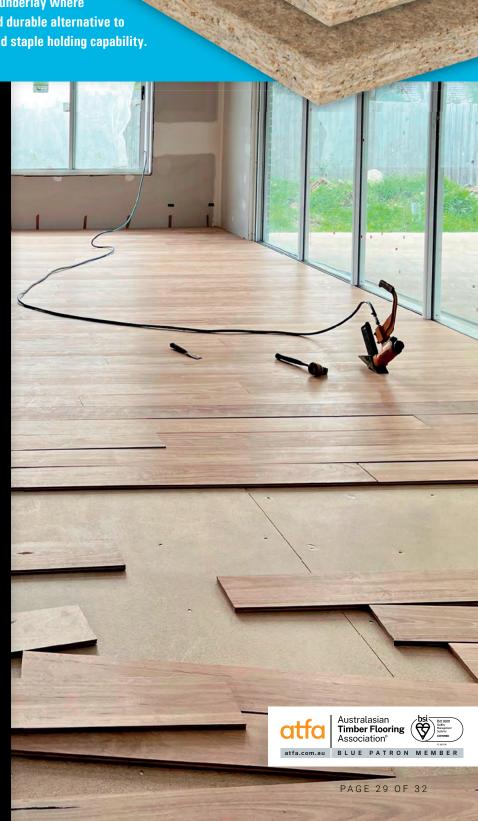





The Most Advanced Quartz Surface



NaturaStone is a 6mm thick Australian Made Quartz Surfacing material combining beauty with ease of handling and exceptional durability.

NaturaStone can be readily applied to an infinite variety of residential and commercial projects.

NaturaStone can be installed as a complete new counter top or surface, or applied on site, easily resurfacing existing counter tops and surfaces.

NaturaStone applications include:

- » Kitchen counter tops
  - » Splashbacks
    - » Bar tops
- » Bathroom vanity tops
- » Shower and bath panels
  - » Shower bases
- » Food service counters
- » Commercial counters
  - » Fascia panels
- » Lift car panels
- » Dining tables
- » Coffee tables

New Colours Available



# About Hurford's





# An Australian Business.

Founded in 1932 Hurford's is an Australian third generation family business, strongly dedicated to the native hardwood timber industry, celebrating over 90 years of trade.



# 50 + Timber Species.

Strong relationships forged over the decades with producers both domestically and internationally allow Hurford's to source an impressive variety of native and exotic specialty timbers.



# Nationwide Distribution.

With distribution warehouses located in Queensland, New South Wales, Victoria, South Australia and Western Australia Hurford's are able to efficiently service the Australian market.



# International Export.

We offer local Hardwoods, Cypress and Hurford Flooring lines for shipping to all major international markets. Hurford's international based branches: New Zealand, North America and France.

# HURFORD'S

## Queensland

400 Stapylton-Jacobs Well Road, Stapylton QLD 4207 (07) 3442 6300 salesqld@hurfordwholesale.com.au

# **New South Wales & Australian Capital Territory**

Unit 6, 34-38 Anzac Avenue, Smeaton Grange NSW 2567 (02) 4646 1406 salesnsw@hurfordwholesale.com.au

## Victoria & Tasmania

51 Commercial Drive, Pakenham VIC 3810 (03) 8794 3300 salesvic@hurfordwholesale.com.au

# **South Australia & Northern Territory**

7-9 Acorn Road, Camden Park SA 5038 (08) 8376 6694 salessa@hurfordwholesale.com.au

# **Western Australia**

2-5 Carbonate Road, Wangara WA 6065 (08) 9303 9918 saleswa@hurfordwholesale.com.au









